



2tec2[®]

high tech flooring


SHADES | COLLECTION OVERVIEW

BARCODE

PATTERN FOR TILES: 



Quartz
Roll • Tile



Diamond
Roll • Tile

CRACKED EARTH

PATTERN FOR TILES: 




Arid
Roll • Tile

NEW BASIC



Topaz Roll
Not available in tiles & 2tec2 Play




Canyon Roll
Not available in tiles & 2tec2 Play



Flint Roll
Not available in tiles & 2tec2 Play




Gritstone Roll
Not available in tiles & 2tec2 Play




Iron Roll
Not available in tiles/Play tiles

HERRINGBONE




Oyster Roll
Not available in tiles & 2tec2 Play



Dune Roll
Not available in tiles & 2tec2 Play



Sandstone Roll
Not available in tiles & 2tec2 Play

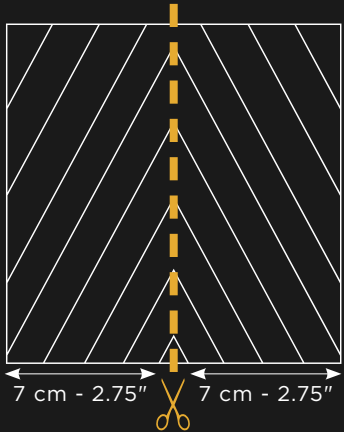

INFINITE

INSTALLATION PATTERN FOR TILES:



Moonrock
Roll • Tile




Coffee Bean
Roll • Tile




Juno
Roll • Tile




Orion
Roll • Tile




Andromeda
Roll • Tile




Titan
Roll • Tile




Planet
Roll • Tile




Nebula
Roll • Tile




Moonless Night
Roll • Tile



Black Hole
Roll • Tile




Neptune
Roll • Tile



Eclipse
Roll • Tile

LUSTRE

INSTALLATION PATTERN FOR TILES:



Morion Brown
Roll • Tile



Magnetite Grey
Roll • Tile

TECHNICAL DATA

Warranty		10 years*		 Environment, health and safety	
Composition		83% vinyl 7% fiberglass 10% PET		Recycled Content	Yes
Backing		Vinyl + Felt		Acoustical layer	70% recycled content
	Total thickness	ISO 1765	5 mm 0.20"	Reach	Compliant
	Total weight	ISO 8543	3000 g/m² 88.5 oz/yd²	LEED v4	Compliant (LEED Contributing Product)
	Roll width	EN ISO 24341	ca. 200 cm ca. 6'7"	BREEAM® International	Compliant
	Roll length	EN ISO 24341	ca. 30 m 32.8 yd	CDPH Standard Method V1.2	Pass
	Tile size	EN 994	50 x 50 cm 19.69" x 19.69"	BREEAM® NOR	Pass
	Level of use	EN 1307 ASTM D5252	Class 33 Heavy commercial use	French VOC Regulation	A+ Certified
Foot traffic test		ASTM D6119-12	Heavy traffic	French CMR components	Pass
	Castor chair suitability	EN 985	Continuous use	AGBB/ABG	Pass
	Reaction to fire	EN 13501-1 ASTM E84	Bfl-s1 Class I - A rating	Belgian VOC Regulation	Pass
Critical radiant flux		ASTM E648-15e1 NFPA	0,84 W/cm² Class I	Indoor Air Comfort Gold	Pass
Smoke density		ASTM E622	< 300	Blue Angel (RAL UZ120)	Pass
	Walking test	ISO 6356 AATCC 134-2006	< 2 kv Permanently antistatic	EN 717-1	E1
	Light fastness	ISO 105-B02	≥ 8	M1 Protocol of July 2017	Pass
	Slip resistance	EN 13893 ASTM C1028-07 DIN 51130 EM 13036-4	≥ 0,3 0,85 R9 65	Plasticizer Content	Phthalate Free
	Impact sound reduction	ISO 10140	19 dB		
	Acoustical absorption	ISO 354	α _w = 0,15		
	Walking noise reduction	EPLF 021029-3	SL70		
	Dimensional stability	EN 986 ISO 2551	Meets the requirements		
	Thermal resistance	ISO 8302	Suitable for underfloor heating		
	CE Certificate	EN 14041	0493-CPR-0151		

CO₂ neutral on demand - *Terms and conditions are available on request

0.1